

SH4605FC-DS SOFT-CLOSING FULL EXTENSION DOUBLE SPRING BALL BEARING SLIDE


三节缓冲双弹簧滚珠滑轨




- 全拉出、可拆式三节双弹簧缓冲钢珠滑轨
- 滑轨宽度: 46mm
- 载重: 35kg
- 表面处理: 电泳、电镀
- 材质: 冷轧钢板
- 材料厚度(内、中、外)轨: 1.5x1.2x1.2mm

- Full-extension, soft-closing, double spring
- Slide width: 46mm
- Dynamic load capacity: 35kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

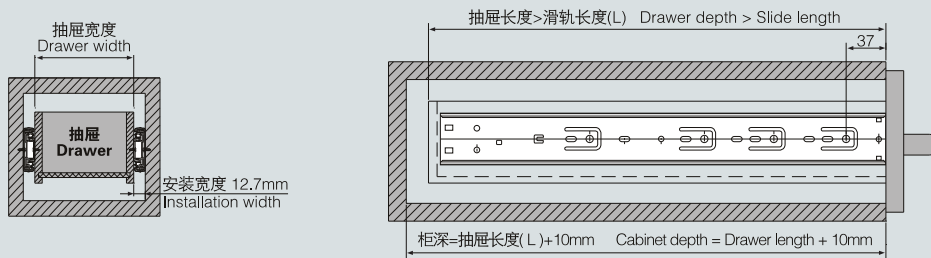

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

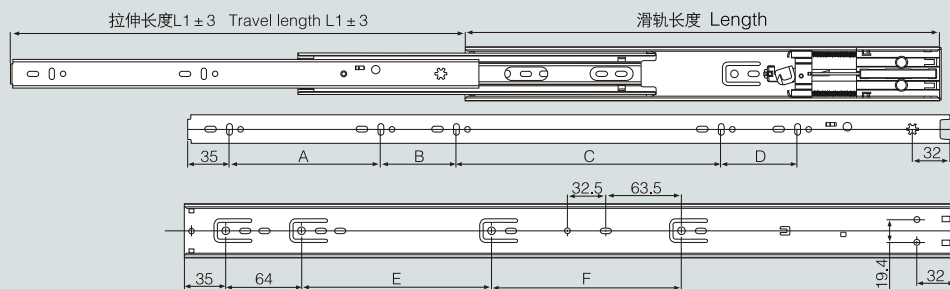

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | F mm | L1 mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|----------|
| SH4605FC-DS-300 | 300 | 64 | | | | | | 254 |
| SH4605FC-DS-350 | 350 | 128 | | | | 64 | | 315 |
| SH4605FC-DS-400 | 400 | 160 | | | | 128 | | 383 |
| SH4605FC-DS-450 | 450 | 128 | 64 | 96 | | 160 | | 452 |
| SH4605FC-DS-500 | 500 | 128 | 64 | 144 | | 160 | 64 | 500 |
| SH4605FC-DS-550 | 550 | 128 | 64 | 192 | | 128 | 96 | 550 |
| SH4605FC-DS-600 | 600 | 128 | 64 | 224 | | 128 | 160 | 600 |
| SH4605FC-DS-650 | 650 | 128 | 64 | 224 | 64 | 160 | 160 | 647 |
| SH4605FC-DS-700 | 700 | 128 | 64 | 256 | 64 | 160 | 224 | 702 |

SH4605FC-03A SOFT-CLOSING FULL EXTENSION BALL BEARING SLIDE


三节缓冲滚珠滑轨




- 全拉出、可拆式三节缓冲钢珠滑轨
- 滑轨宽度: 46mm
- 载重: 35kg
- 表面处理: 电泳、电镀
- 材质: 冷轧钢板
- 材料厚度(内、中、外)轨: 1.5x1.2x1.2mm

- Full-extension, soft-closing
- Slide width: 46mm
- Dynamic load capacity: 35kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

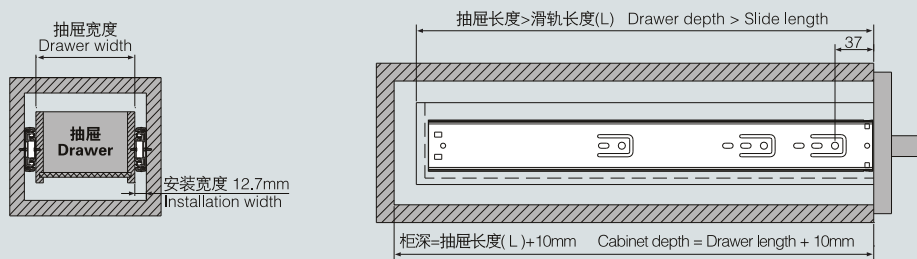

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

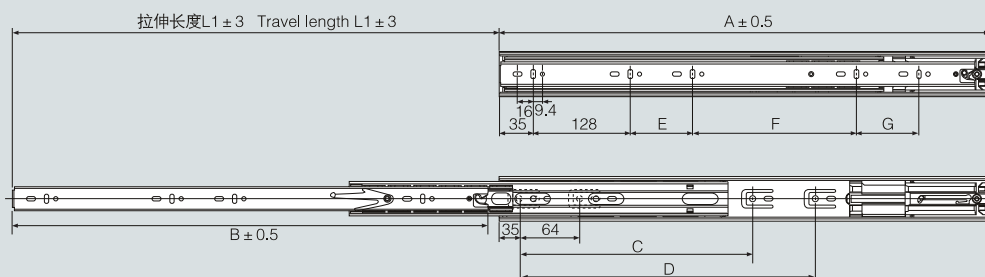

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | L1 mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|---------|----------|
| SH4605FC-03A-300 | 300 | 300 | 286 | | | 86 | | | 297 |
| SH4605FC-03A-350 | 350 | 350 | 336 | 128 | | 128 | | | 350 |
| SH4605FC-03A-400 | 400 | 400 | 386 | 192 | | 160 | | | 400 |
| SH4605FC-03A-450 | 450 | 450 | 436 | 224 | | 224 | | | 450 |
| SH4605FC-03A-500 | 500 | 500 | 486 | 224 | 288 | 64 | 192 | | 500 |
| SH4605FC-03A-550 | 550 | 550 | 536 | 224 | 320 | 64 | 192 | 64 | 550 |
| SH4605FC-03A-600 | 600 | 600 | 586 | 224 | 384 | 64 | 224 | 64 | 600 |


SH4605FC-03B SOFT-CLOSING FULL EXTENSION BALL BEARING SLIDE 三节缓冲滚珠滑轨




- 全拉出、可拆式三节缓冲滚珠滑轨
- 滑轨宽度: 46mm
- 载重: 35kg
- 表面处理: 电泳、电镀
- 材质: 冷轧钢板
- 材料厚度(内、中、外轨): 1.5x1.2x1.2mm

- Full-extension, soft-closing
- Slide width: 46mm
- Dynamic load capacity: 35kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

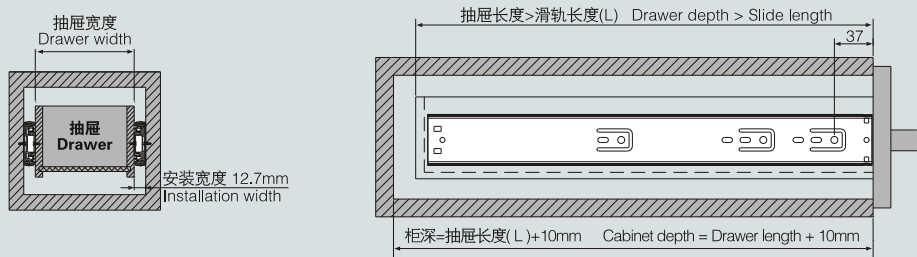

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

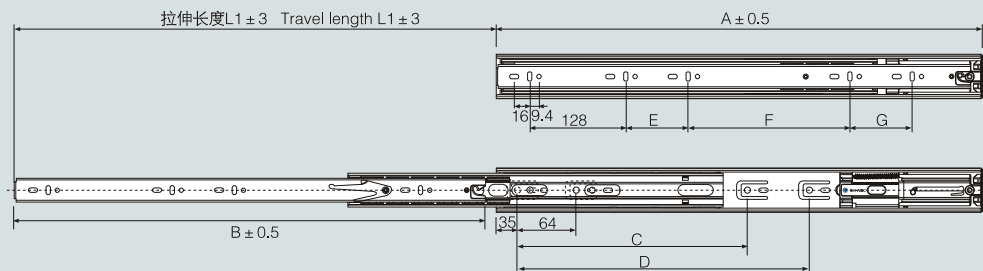

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | L1 mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|---------|----------|
| SH4605FC-03B-300 | 300 | 300 | 289 | | | 86 | | | 297 |
| SH4605FC-03B-350 | 350 | 350 | 339 | 128 | | 128 | | | 350 |
| SH4605FC-03B-400 | 400 | 400 | 389 | 192 | | 160 | | | 400 |
| SH4605FC-03B-450 | 450 | 450 | 439 | 224 | | 224 | | | 450 |
| SH4605FC-03B-500 | 500 | 500 | 489 | 224 | 288 | 64 | 192 | | 500 |
| SH4605FC-03B-550 | 550 | 550 | 539 | 224 | 320 | 64 | 192 | 64 | 550 |
| SH4605FC-03B-600 | 600 | 600 | 589 | 224 | 384 | 64 | 224 | 64 | 600 |


SH4605FR PUSH-OPEN FULL EXTENSION BALL BEARING SLIDE 三节反弹滚珠滑轨




- 全拉出、可拆式反弹三节钢珠滑轨
- 滑轨宽度：45.7mm
- 载重：36kg
- 表面处理：电泳、电镀
- 材质：冷轧钢板
- 材料厚度(内、中、外)轨：1.5x1.2x1.2mm

- Full-extension, push to open
- Slide width: 45.7mm
- Dynamic load capacity: 36kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

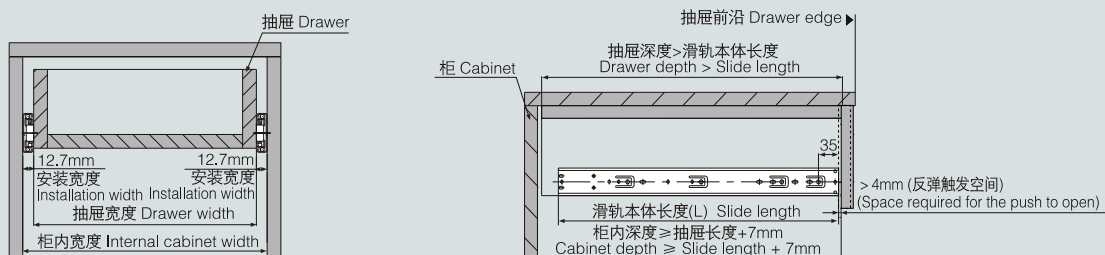

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

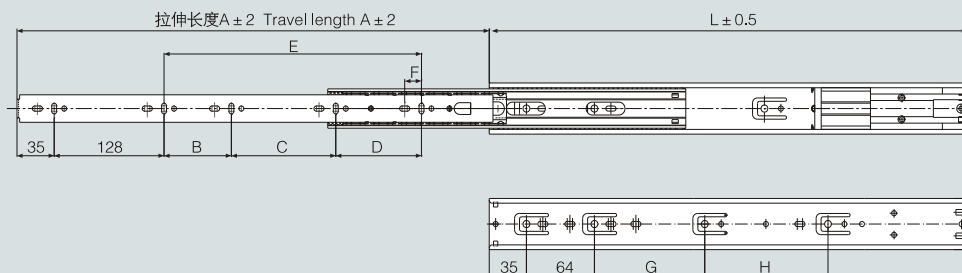


| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | L mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| SH4605FR-300 | 300 | 251 | | | | | | | | 300 |
| SH4605FR-350 | 350 | 351 | | | | | | | | 350 |
| SH4605FR-400 | 400 | 401 | | | | | | | | 400 |
| SH4605FR-450 | 450 | 451 | | | | | | 160 | | 450 |
| SH4605FR-500 | 500 | 501 | 64 | 192 | | | | 160 | | 500 |
| SH4605FR-550 | 550 | 551 | 64 | 192 | 54.6 | 310.6 | | 160 | | 550 |
| SH4605FR-600 | 600 | 601 | 64 | 224 | 64 | 352 | 16 | 160 | 128 | 600 |

R4615F HEAVY-DUTY FULL EXTENSION BALL BEARING SLIDE 重型三节滚珠滑轨




- 全拉出三节重型钢珠滑轨
- 滑轨宽度：46.3mm
- 载重：68kg
- 表面处理：电泳、电镀
- 材料：冷轧钢板
- 材料厚度(内、中、外)轨：1.5 × 1.3 × 1.5mm
- Heavy-duty, full-extension
- Slide width: 46.3mm
- Dynamic load capacity: 68kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.3x1.5mm


滑轨安装尺寸 Installation size

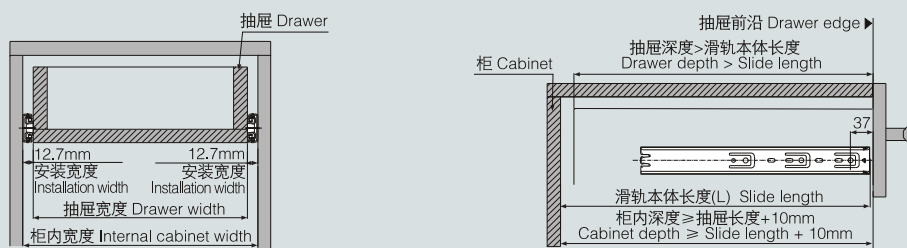

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

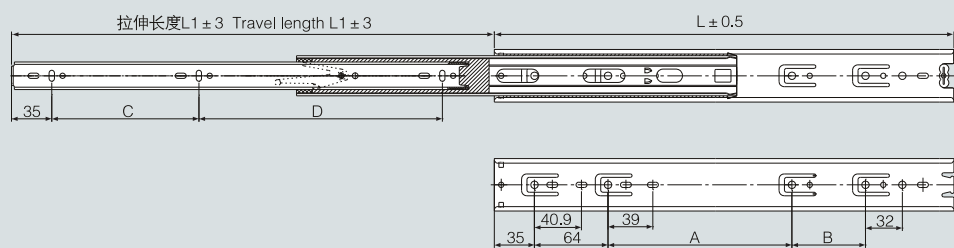

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | L mm | L1 mm |
|------------------|--------------|---------|---------|---------|---------|---------|----------|
| R4615F-400 | 400 | 160 | 64 | 128 | 211.8 | 400 | 420 |

卡口形状及距离可按客户实际情况，如图表没有其它规格型号，可按客户实际要求设计。
Bayonet shape and distance can be made according to customer's requirement.

R4605F/R4605-H FULL EXTENSION BALL BEARING SLIDE 三节滚珠滑轨




注：R4605-H 互锁三节滚珠滑轨


- 三节滚珠滑轨
- 滑轨宽度：45.7mm
- 载重：45kg
- 表面处理：电泳、电镀
- 材质：冷轧钢板
- 材料厚度(内、中、外)轨：1.5x1.2x1.2mm

- Full-extension
- Slide width: 45.7mm
- Dynamic load capacity: 45kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

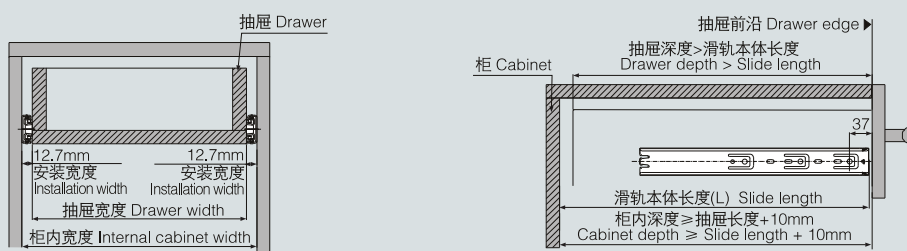

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

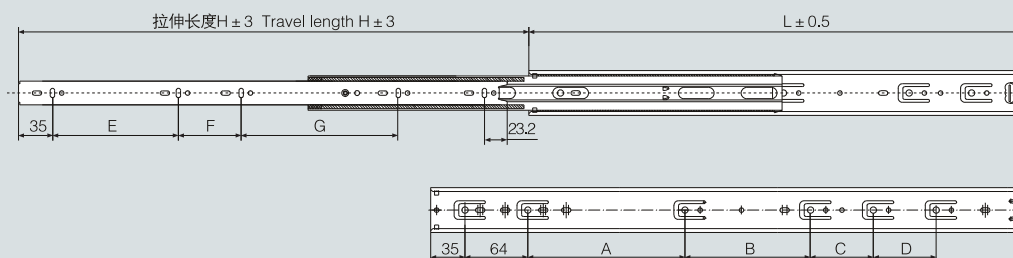

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | L mm | H mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| R4605F-250 | 250 | 86 | | | | 64 | | | 250 | 238 |
| R4605F-300 | 300 | 136 | | | | 128 | | | 300 | 306 |
| R4605F-350 | 350 | 160 | | | | 128 | | | 350 | 370 |
| R4605F-400 | 400 | 160 | 64 | | | 128 | | | 400 | 420 |
| R4605F-450 | 450 | 160 | 128 | | | 128 | 192 | | 450 | 469 |
| R4605F-500 | 500 | 160 | 128 | 64 | | 128 | 64 | 160 | 500 | 519 |
| R4605F-550 | 550 | 160 | 128 | 64 | | 128 | 64 | 192 | 550 | 548 |
| R4605F-600 | 600 | 160 | 128 | 64 | 64 | 128 | 64 | 224 | 600 | 621 |


R4605F-Z FULL EXTENSION BALL BEARING SLIDE 三节滚珠滑轨




- 全拉出三节自锁钢珠滑轨
- 滑轨宽度: 45.7mm
- 载重: 35kg
- 表面处理: 电泳、电镀
- 材质: 冷轧钢板
- 材料厚度(内、中、外)轨: 1.5x1.2x1.2mm

- Full-extension, self-closing
- Slide width: 45.7mm
- Dynamic load capacity: 35kg
- Finish: electrophoresis, plating
- Material: cold rolled steel
- Thickness of material(I/M/O)part: 1.5x1.2x1.2mm


滑轨安装尺寸 Installation size

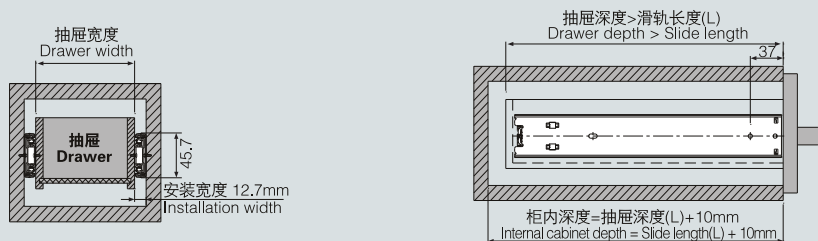

滑轨截面图 Profile



滑轨安装孔尺寸 Hole pattern

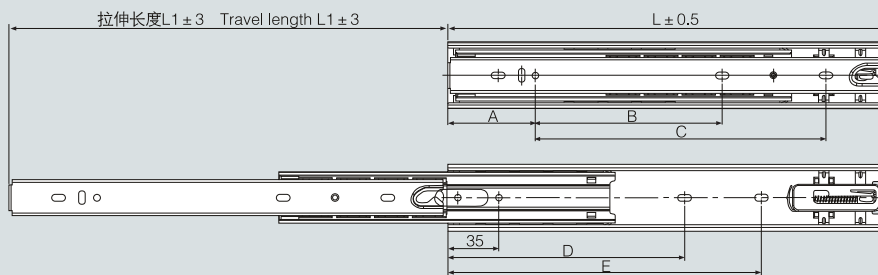

| 产品型号 Item No. | Length mm | A mm | B mm | C mm | D mm | E mm | L mm | L1 mm |
|------------------|--------------|---------|---------|---------|---------|---------|---------|----------|
| R4605F-Z-254 | 254 | 60 | 153 | | 166 | | 254 | 249 |
| R4605F-Z-265 | 265 | 60 | 160 | | 187 | | 265 | 265 |
| R4605F-Z-275 | 275 | 60 | 160 | | 187 | | 275 | 269 |
| R4605F-Z-300 | 300 | 60 | 199 | | 212 | | 300 | 300 |
| R4605F-Z-310 | 310 | 60 | 198 | | 227 | | 310 | 300 |
| R4605F-Z-350 | 350 | 25 | 128 | 256 | 275 | | 350 | 330 |
| R4605F-Z-375 | 375 | 60 | 69 | 256 | 275 | | 375 | 375 |
| R4605F-Z-400 | 400 | 60 | 128 | 256 | 275 | | 400 | 400 |
| R4605F-Z-500 | 500 | 60 | 192 | 378 | 275 | 423 | 500 | 524 |
| R4605F-Z-540 | 540 | 20 | 208 | 416 | 275 | 423 | 540 | 540 |